



TB06X12




APC AMERICAN PRECAST CONCRETE, INC.

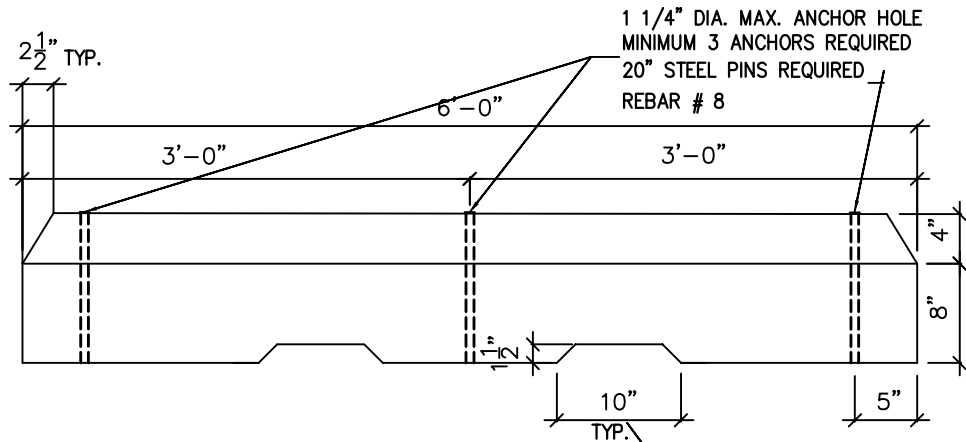

ALTERATIONS CAN BE MADE FOR A SMALLER OR LARGER DRAINAGE SLOTS IF SPECIFICATIONS REQUIRE THEM TO BE.

4-#4 BARS GRADE 60 (CONT). #10 GAUGE WIRE TIES AT EACH SIDE OF PIN HOLES MIN. 6 REQUIRED

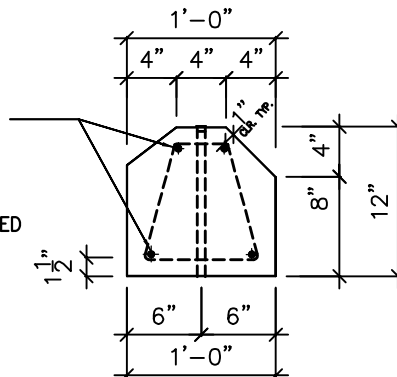

1 6' PRECAST CONCRETE WHEEL STOP
 ST7 | ST8 SCALE: N.T.S.

NOTE:

PORTLAND CEMENT CONCRETE SHALL BE A, SIX SACK MIX. DEVELOPING NOTHING LESS THAN 5000 PSI COMPRESSIVE STRENGTH AT 28 DAYS.

WITH OR WITHOUT WEEP HOLES

FACTORY: 2246 N. DURFEE AVE. EL MONTE, CA. 91732
 TEL. (626) 443-0970 FAX (818) 827-4941
 WEB: WWW. APC WHEELSTOPS.COM